



Job:
Item No:
Notes:

Model Number: **ER236**

Retarder Proofer

SPECIFICATIONS

Construction

- Stainless Steel Construction
- Aluminum Flush Floor Entry
- 2" (51 mm) Thick Sealed Polyurethane Insulation
- Interior & Exterior Door Bumpers
- Ships Fully Assembled

Controls

- 7 Day Programmable Timer
- Mechanical Thermostat Controls for Heat & Humidity
- Easy To Read Controls

Electrical Characteristics

- 120/208 V - 1 Ph - 27 A - 5.7 kW - 3 Wires - 60 Hz
- 120/240 V - 1 Ph - 27 A - 5.7 kW - 3 Wires - 60 Hz
- Other voltages available upon request
- NEMA 6-15P

Performance

- Refrigeration Mode - Minimum Temperature 36°F (2°C)
- Proofing Mode - Maximum Temperature 110°F (43°C) & Minimum Temperature 90°F (32°C) with Relative Humidity up to 95%
- Automatic Water Feed
- No Drain Required

Water Connection

- 1/4" NPT

Clearances

- 3" Around Sides & Back, 10 Foot High Ceiling required for maintenance

Accessories/Options

- Water Filter (PLF240)
- Solid Door (SD)
- Prison Package
- Additional Fixed Side Shelving

Warranty

- One Year Labor & Two Year Parts



Interior Dimensions (Per Section)

- 25" W x 31 5/8" D x 68 1/2" H
(635 mm W x 803 mm D x 1734 mm H)

Door Opening

- 27" W x 68 1/2" H (686 mm W x 1734 mm H)

Short Specification

Retarder Proofer, Electric, Holds (1) Single End Load Rack Per Section, Stainless Steel Construction, Aluminum Floor with Flush Entry, Full View Glass Doors, Brightly Lit, Integrated Automatic Gravitational Cooling System, No Drain Required, 7 Day Programmable Timer, Easy to See Controls, Ships Fully Assembled. One year labor and two year parts warranty

ER236 Retarder Proofer with Programmable Timer

Features and Benefits


Doyon's legendary retarder proofer is the best tool a baker can have. Designed to be easy to operate, high volume capability, but also save on time and labor. Load your unit the night before and watch as the unit refrigerates the dough overnight and by the time you arrive have your product ready to bake, fry or more.

- Heavy-duty stainless steel
- Automatic Water Feed
- Fully Illuminated
- Ships Fully Assembled, Perfect for Faster Installation
- 7 Day Programmable Timer Standard



Dimensions

Model	Height		Depth		Width		Weight	
	in	mm	in	mm	in	mm	lbs	kg
ER236	89 3/4"	2280	44 1/4"	1125	71"	1805	875	397

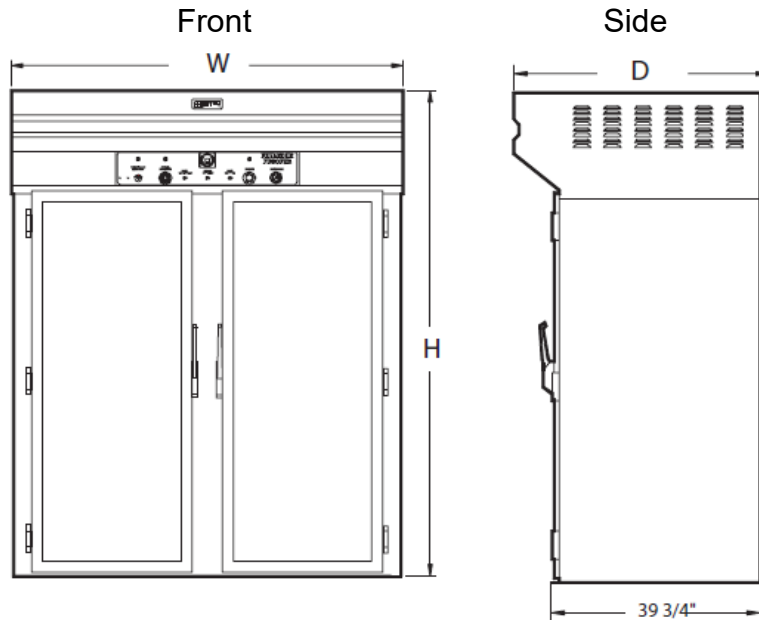

Specifications subject to change through product improvement and innovation



Doyon
 5600 13th Street, Menominee, MI 49858
 906.863.4401 • 800.338.9886
 www.doyon.qc.ca

Follow us



Form ER236 .1120

